



PLANT TUBE

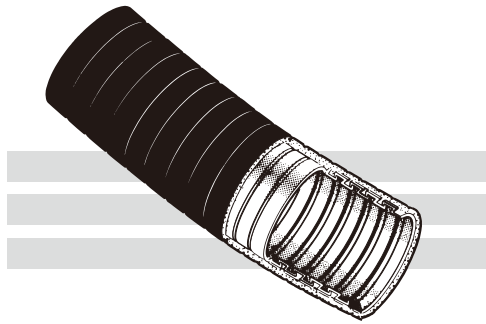

U.L. Type


対応温度：-20°C～+60°C
標準色：灰色 黒色は受注品となります

Temperature range : -20 to +60 deg.
Standard color : Gray, Optional color : Black



COPPER

3/8" ~ 1 1/4"
SQUARE LOCK TYPE



1 1/2" ~ 3"
SEMI INTER LOCK TYPE



Catalog No.	Conduit Size	I.D. (mm)		O.D. (mm)		Standard Coil (m)	Approx Inside Bend Diameter (mm)	Wt (kg) Per 1. Carton	Material
		Min	Max	Min	Max				
LA-10	3/8"	12.29	12.80	17.5	18.0	30	102	14	PVC·SPC
LA-11	1/2"	15.80	16.31	20.8	21.3	30	153	15	PVC·SPC
LA-12	3/4"	20.83	21.34	26.2	26.7	30	214	25	PVC·SPC
LA-13	1"	26.44	27.08	32.8	33.4	30	280	38	PVC·SPC
LA-14	1 1/4"	35.05	35.81	41.4	42.2	15	350	26	PVC·SPC
ACUL-42	1 1/2"	40.10	40.64	47.4	48.3	20	380	26	PVC·SPC
ACUL-54	2"	51.31	51.94	59.4	60.3	10	450	17	PVC·SPC
LA-17	2 1/2"	63.00	63.60	72.1	73.0	7.5	406.4	22	PVC·SPC
LA-18	3"	78.00	78.70	87.9	88.8	7.5	508	29	PVC·SPC

3/8"～1 1/4"はコア内部に銅線入りとなります。LAタイプは米国Electri-Flex社製となります。
1 1/2"～2"はCSA規格には対応していません。